


✓

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	55 Ω	130 Ω	250 Ω
Minimum	- Ω	104 Ω	- Ω

FERRITE CORE DIMENSIONS (SPEC): mm [in]

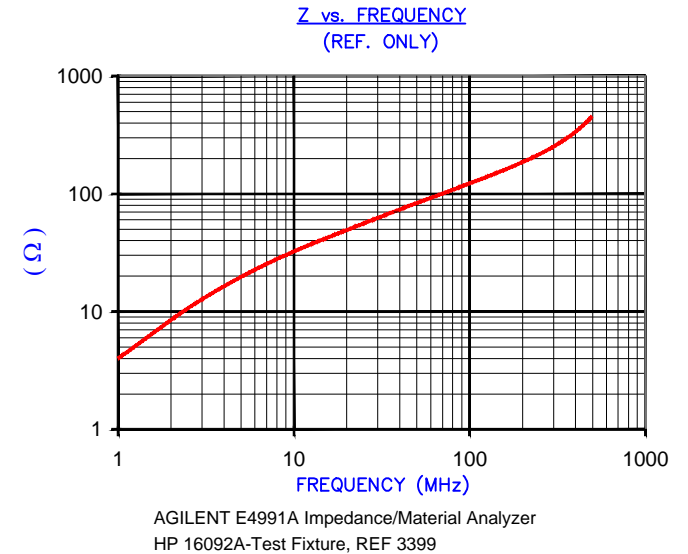

NOTES:

1. CASE UL FLAMMABILITY RATING: 94 V-0
2. ASSEMBLED PART #: 28A3039-0A2
3. FOR CORE DIMENSIONS SEE STEWARD P/N 28A3039-000.
4. CASE COLOR: -0A2 BLACK CASE.
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

CASE DIMENSIONS (SPEC): mm [in]

DIMENSIONS A				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
REV	DESCRIPTION	DATE	BY					
J	UPDATE COMPANY LOGO ,ADD NOTE 5	08/23/14	QIU	PROJECT/PART NUMBER: 28A3039-0A2		REV	PART TYPE: FERRITE SNAP-ON	DRAWN BY:
H	UPDATE CASE TOLERANCES UPDATE COMPANY LOGO	05/08/08	TMB			J		
G	UPDATE Z SPECS AND COMPANY LOGO	07/03/07	JRK	DATE: 06/27/01		SCALE:	MATERIAL:	
F	RE-ACTIVATE PRINT, REM NOTE 4, UPDATE Z SPECS, ADD REF NUMBER	7/21/04	JRK			CAD #	28A3039-0A2-J	TOOL #
E	CHANGE P/N FROM -0A* TO -0A2 REVISE NOTES 2, 4, & 5	08/15/03	TMB	DESCRIPTION				
D	CHANGE PRINT FORMAT CHANGE Z SPECS AND ADD CURVE REVISE NOTE 3,4,& 5	06/26/03	TMB					